

## Description

The Profile® II filters effectively remove agglomerated particles and gels from oxide, tungsten and copper CMP slurries, while not affecting slurry particle distribution.

## Features & Benefits

- Depth filter with consistent, reproducible performance
- Continuously profiled pore structure for built-in prefiltration and long service life
- Steep efficiency curves result in minimal strip-out of desirable slurry particles while sharply increasing removal of oversized particles




## Materials of Construction

Components	Materials
Filter Media	Polypropylene
Core, Cage, End Caps	Polypropylene
O-rings Option	Ethylene Propylene (EPR)

## Specifications

Removal Ratings	0.2 µm, 0.3 µm, 0.5 µm, 1 µm, 3 µm, 5 µm, 10 µm, 20 µm, 30 µm and 40 µm (Profile filter removal ratings can be 5–10 times finer than traditional ratings for depth filters.)
Nominal Length	254 mm / 10 in, 508 mm / 20 in, 762 mm / 30 in and 1016 mm / 40 in
O-ring Size / End Caps	Code 3 (222 double O-ring flat end) Code 25 (222 double O-ring flat end)
Maximum Temperature	82 °C / 180 °F
Maximum Differential Pressure	0.41 MPa @ 30°C / 60 psig @ 85°F 0.34 MPa @ 50°C / 50 psid @ 120°F 0.2 MPa @ 70°C / 30 psid @ 160°F 0.1 MPa @ 82°C / 15 psid @ 180°F

## Typical Flow Characteristics - 1cP fluid, 20 °C

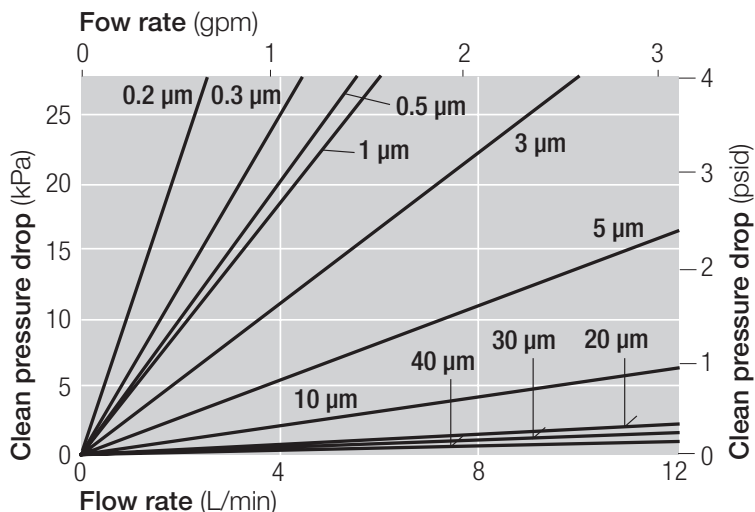

## Part Numbers / Ordering Information

Part Number	Removal Rating <sup>1</sup> (μm)	Nominal Length <sup>1</sup> (mm / in)	Configuration Code <sup>1</sup>	O-Ring Material <sup>1</sup>
AB1Y00225J	0.2	254 / 10	25	EPR
AB2Y00225J	0.2	508 / 20	25	EPR
AB1Y0033J	0.3	254 / 10	3	EPR
AB2Y0033J	0.3	508 / 20	3	EPR
AB1Y0053J	0.5	254 / 10	3	EPR
AB2Y0053J	0.5	508 / 20	3	EPR
AB1Y0103J	1	254 / 10	3	EPR
AB2Y0103J	1	508 / 20	3	EPR
AB1Y0303J	3	254 / 10	3	EPR
AB2Y0303J	3	508 / 20	3	EPR
AB1Y0503J	5	254 / 10	3	EPR
AB2Y0503J	5	508 / 20	3	EPR
AB1Y1003J	10	254 / 10	3	EPR
AB2Y1003J	10	508 / 20	3	EPR
AB1Y2003J	20	254 / 10	3	EPR
AB2Y2003J	20	508 / 20	3	EPR
AB1Y3003J	30	254 / 10	3	EPR
AB2Y3003J	30	508 / 20	3	EPR
AB1Y4003J	40	254 / 10	3	EPR
AB2Y4003J	40	508 / 20	3	EPR

<sup>1</sup> Other removal ratings, lengths, configurations, and O-ring materials are available.

Unit conversion: 1 bar = 100 kilopascals



### Microelectronics

25 Harbor Park Drive  
Port Washington, NY 11050  
+1 516 484 3600 telephone  
+1 800 360 7255 toll free US

### Nihon Pall Ltd.

6-5-1, Nishishinjuku,  
Shinjuku-ku  
Tokyo 163-1325 Japan  
+81 3 6901 5700 telephone  
+81 3 5322 2109 fax

Pall Corporation has offices and plants throughout the world. To locate the Pall office or distributor nearest you, visit [www.pall.com/contact](http://www.pall.com/contact).

The information provided in this literature was reviewed for accuracy at the time of publication. Product data may be subject to change without notice. For current information consult your local Pall distributor or contact Pall directly.

IF APPLICABLE Please contact Pall Corporation to verify that the product conforms to your national legislation and/or regional regulatory requirements for water and food contact use.

© Copyright 2024, Pall Corporation. Pall, , are trademarks of Pall Corporation.  
® Indicates a trademark registered in the USA.